

Digital Communication in the Modern World

Transport Layer: TCP timeout optimizations, TCP Flow Control, Congestion


<http://www.cs.huji.ac.il/~com1>
com1@cs.huji.ac.il

Some of the slides have been borrowed from:
Computer Networking: A Top Down Approach Featuring the Internet,
2nd edition,
Jim Kurose, Keith Ross
Addison-Wesley, July 2002.

Computer Communication 2005-6


1

TCP: retransmission scenarios

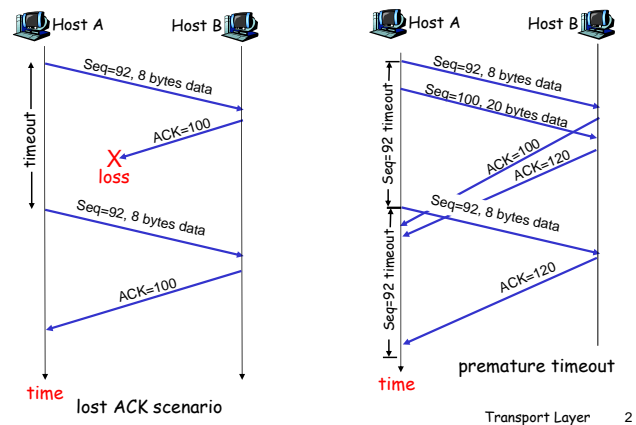

Transport Layer 2

TCP retransmission scenarios (more)

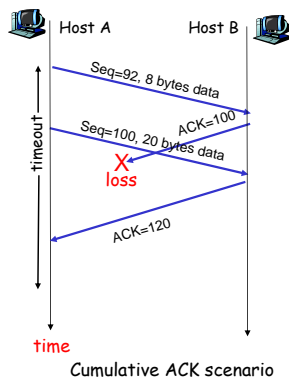

Cumulative ACK scenario

Transport Layer 3

TCP Timeout and Round Trip Time

Q: how to set TCP timeout value?

- **longer than RTT:**
 - but RTT varies
- **too short:** premature timeout
 - unnecessary retransmissions
- **too long:** slow reaction to segment loss

Q: how to estimate RTT?

- **SampleRTT:** measured time from segment transmission until ACK receipt
 - ignore retransmissions
- **SampleRTT** will vary, want estimated RTT "smoother"
 - average several recent measurements, not just current SampleRTT

Transport Layer 4

TCP Timeout and Round Trip Time

$$\text{EstimatedRTT} = (1-\alpha) * \text{EstimatedRTT} + \alpha * \text{SampleRTT}$$


- Exponential Weighted Moving Average (EWMA)
- influence of past sample decreases exponentially fast
- typical value: $\alpha = 0.125$

EstimatedRTT =

$$\alpha \sum_{j=1}^{n-1} (1-\alpha)^{j-1} \text{SampleRTT}_j + (1-\alpha)^n \text{SampleRTT}_n$$

Transport Layer 5

Example RTT estimation:

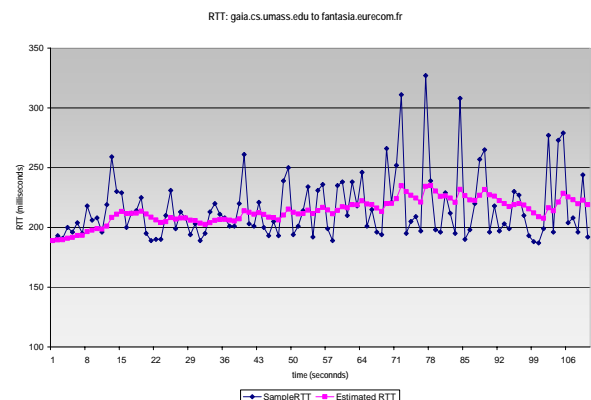

Transport Layer 6

TCP Timeout and Round Trip Time

Setting the timeout

- EstimatedRTT plus "safety margin"
 - large variation in EstimatedRTT \Rightarrow larger safety margin
- first estimate of how much SampleRTT deviates from EstimatedRTT:

$$\text{DevRTT} = (1-\beta) * \text{DevRTT} + \beta * |\text{SampleRTT} - \text{EstimatedRTT}|$$

(typically, $\beta = 0.25$)

Then set timeout interval:

$$\text{TimeoutInterval} = \text{EstimatedRTT} + 4 * \text{DevRTT}$$

Transport Layer 7

TCP ACK generation [RFC 1122, RFC 2581]

Event at Receiver	TCP Receiver action
Arrival of in-order segment with expected seq #. All data up to expected seq # already ACKed	Delayed ACK. Wait up to 500ms for next segment. If no next segment, send ACK
Arrival of in-order segment with expected seq #. One other segment has ACK pending	Immediately send single cumulative ACK, ACKing both in-order segments
Arrival of out-of-order segment higher-than-expected seq. # . Gap detected	Immediately send duplicate ACK, indicating seq. # of next expected byte
Arrival of segment that partially or completely fills gap	Immediate send ACK, provided that segment starts at lower end of gap

Transport Layer 8


Fast Retransmit

- Time-out period often relatively long:
 - long delay before resending lost packet
- Detect lost segments via duplicate ACKs.
 - Sender often sends many segments back-to-back
 - If segment is lost, there will likely be many duplicate ACKs.
- If sender receives 3 ACKs for the same data, it supposes that segment after ACKed data was lost:
 - fast retransmit**: resend segment before timer expires

Transport Layer 9

TCP Flow Control

- receive side of TCP connection has a receive buffer:




- app process may be slow at reading from buffer

flow control
sender won't overflow receiver's buffer by transmitting too much, too fast

- speed-matching service: matching the send rate to the receiving app's drain rate

Transport Layer 10

TCP Flow control: how it works




(Suppose TCP receiver discards out-of-order segments)

- spare room in buffer = RcvWindow
- RcvBuffer - [LastByteRcvd - LastByteRead]

- Receiver advertises spare room by including value of RcvWindow in segments
- Sender limits unACKed data to RcvWindow
 - guarantees receive buffer doesn't overflow

Transport Layer 11

TCP segment structure

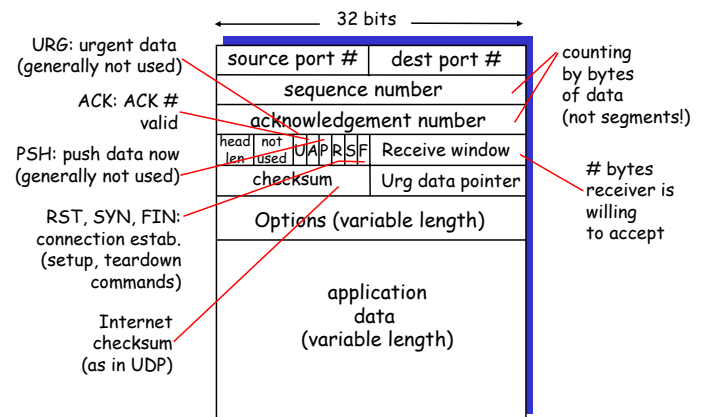

Transport Layer 12

Recall that TCP ****now**** gives:

- ☑ reliable data transfer (make sure the message gets through)
- ☑ flow control (don't overwhelm the receiver)
- ➡ ☐ congestion control (don't overwhelm the network)

UDP gives:

- ☐ No reliability, no packet ordering
- ☐ No flow control
- ☐ ...




Principles of Congestion Control

Congestion:

- ☐ informally: "too many sources sending too much data too fast for *network* to handle"
- ☐ different from flow control!
- ☐ is expressed as:
 - lost packets (buffer overflow at routers)
 - long delays (queueing in router buffers)
- ☐ a top-10 network problem!
- ☐ packet retransmission treats the symptom not the cause (even worsens the cause!)

Causes/costs of congestion: scenario 1


- ☐ two senders, two receivers
- ☐ one router, infinite buffers
- ☐ no retransmission

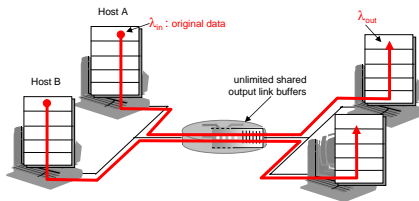

- ☐ large delays when congested
- ☐ maximum achievable throughput




Causes/costs of congestion: scenario 2

- ☐ one router, *finite* buffers
- ☐ sender retransmission of lost packet

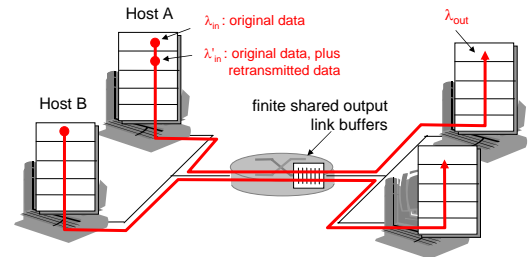

Causes/costs of congestion: scenario 2

- ☐ always: $\lambda_{in} = \lambda_{out}$ (goodput), $\lambda'_{in} > \lambda_{out}$
- ☐ "perfect" retransmission (no router overhead) only when loss
- ☐ retransmission of delayed (not lost) packet makes λ'_{in} even larger (than perfect case) for same λ_{out}




"costs" of congestion:

- ☐ more work (retrans) for given "goodput"
- ☐ unneeded retransmissions: link carries multiple copies of pkt


Causes/costs of congestion: scenario 3

- ☐ four senders
- ☐ multihop paths
- ☐ timeout/retransmit

Q: what happens as λ_{in} and λ'_{in} increase?

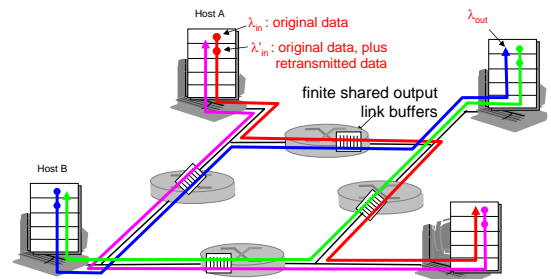

Causes/costs of congestion: scenario 3

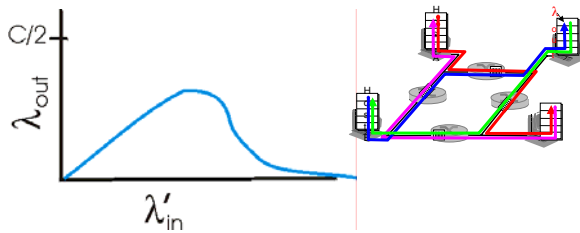

Another "cost" of congestion:

- when packet dropped, any "upstream transmission capacity used for that packet was wasted!

Approaches towards congestion control

Two broad approaches towards congestion control:

End-end congestion control:

- no explicit feedback from network
- congestion inferred from end-system observed loss, delay
- approach taken by TCP

Network-assisted congestion control:

- routers provide feedback to end systems
 - single bit indicating congestion (SNA, DECbit, ATM)
 - explicit rate that sender should send at