LECTURE 6: MULTIAGENT INTERACTIONS

An Introduction to Multiagent Systems

http://www.csc.liv.ac.uk/˜mjw/pubs/imas/

1 What are Multiagent Systems?

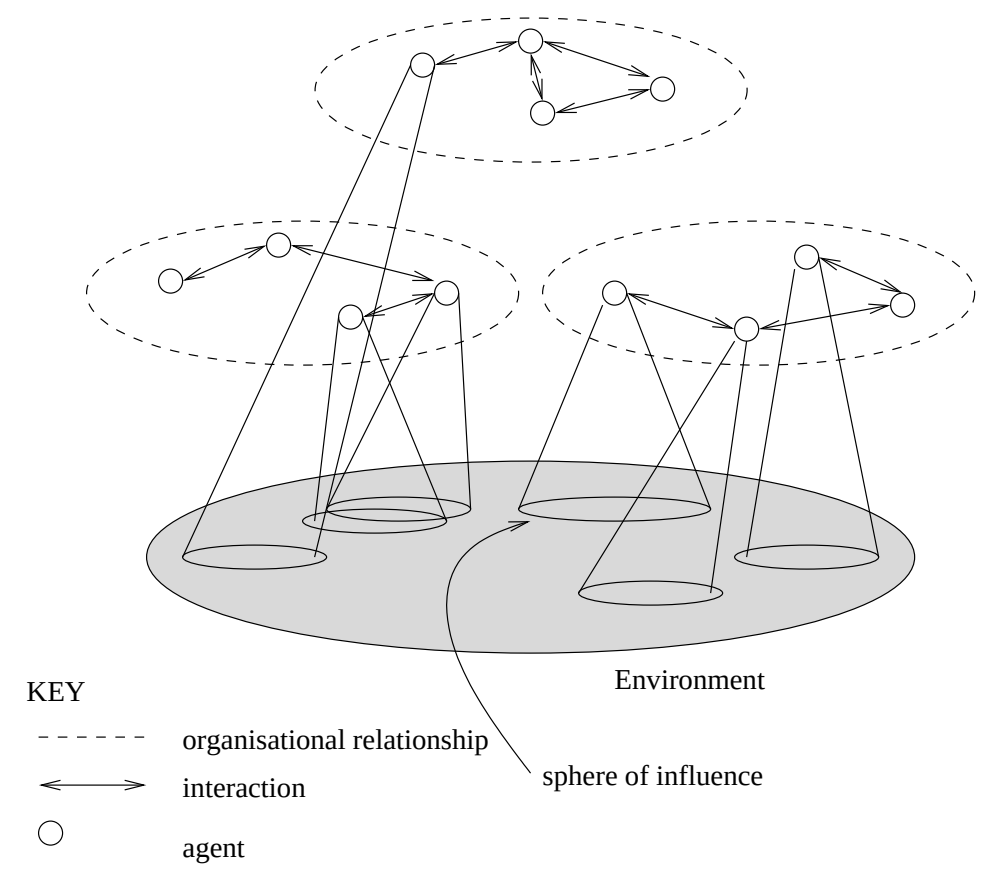

Thus a multiagent system contains a number of agents . . .

- . . . which interact through communication . . .
- . . . are able to act in an environment . . .
- . . . have different "spheres of influence" (which may coincide). . .
- . . . will be linked by other (organisational) relationships.

2 Utilities and Preferences

- Assume we have just two agents: $Ag = \{i, j\}$.
- Agents are assumed to be *self-interested*: they *have preferences over how the environment is*.
- Assume $\Omega = \{\omega_1, \omega_2, \ldots\}$ is the set of "outcomes" that agents have preferences over.
- We capture preferences by *utility functions*:

$$u_i : \Omega \to I\!R$$
$$u_j : \Omega \to I\!R$$

- Utility functions lead to *preference orderings* over outcomes:

$$\omega \succeq_i \omega' \quad \text{means} \quad u_i(\omega) \geq u_i(\omega')$$
$$\omega \succ_i \omega' \quad \text{means} \quad u_i(\omega) > u_i(\omega')$$

What is Utility?

- Utility is *not* money (but it is a useful analogy).
- Typical relationship between utility & money:

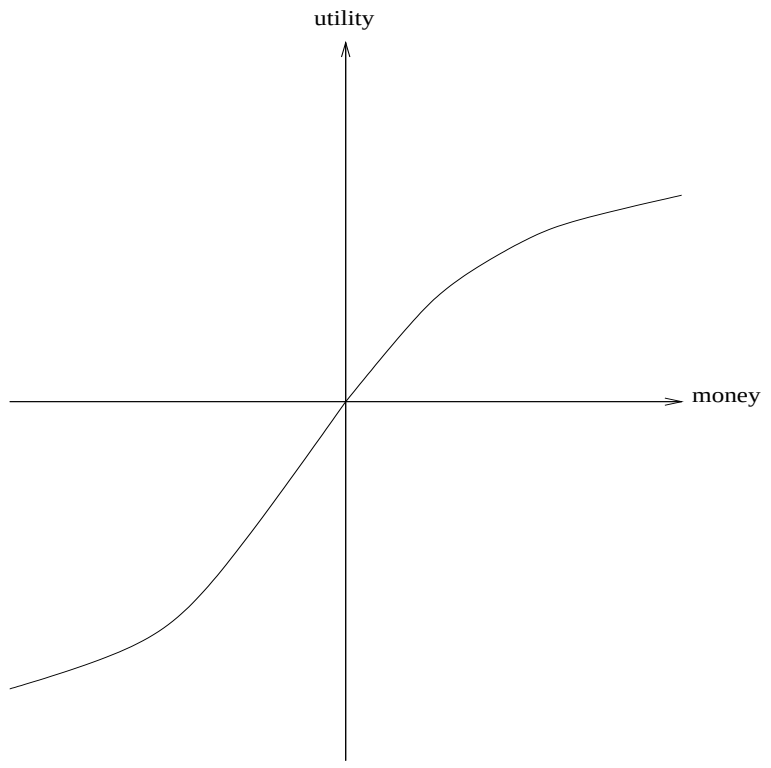

3 Multiagent Encounters

- We need a model of the environment in which these agents will act. . .
  - agents simultaneously choose an action to perform, and as a result of the actions they select, an outcome in Ω will result;
  - the *actual* outcome depends on the *combination* of actions;
  - assume each agent has just two possible actions that it can perform C (“cooperate”) and “D” (“defect”).
- Environment behaviour given by *state transformer function*:

$$\tau : \underbrace{Ac}_{\text{agent } i\text{'s action}} \times \underbrace{Ac}_{\text{agent } j\text{'s action}} \to \Omega$$

- Here is a state transformer function:

$$\tau(D,D) = \omega_1 \quad \tau(D,C) = \omega_2 \quad \tau(C,D) = \omega_3 \quad \tau(C,C) = \omega_4$$

  (This environment is sensitive to actions of both agents.)
- Here is another:

$$\tau(D,D) = \omega_1 \quad \tau(D,C) = \omega_1 \quad \tau(C,D) = \omega_1 \quad \tau(C,C) = \omega_1$$

  (Neither agent has any influence in this environment.)
- And here is another:

$$\tau(D,D) = \omega_1 \quad \tau(D,C) = \omega_2 \quad \tau(C,D) = \omega_1 \quad \tau(C,C) = \omega_2$$

  (This environment is controlled by j.)

Rational Action

- Suppose we have the case where *both* agents can influence the outcome, and they have utility functions as follows:

$$\begin{array}{llll} u_i(\omega_1) = 1 & u_i(\omega_2) = 1 & u_i(\omega_3) = 4 & u_i(\omega_4) = 4 \\ u_j(\omega_1) = 1 & u_j(\omega_2) = 4 & u_j(\omega_3) = 1 & u_j(\omega_4) = 4 \end{array}$$

- With a bit of abuse of notation:

$$\begin{array}{llll} u_i(D,D) = 1 & u_i(D,C) = 1 & u_i(C,D) = 4 & u_i(C,C) = 4 \\ u_j(D,D) = 1 & u_j(D,C) = 4 & u_j(C,D) = 1 & u_j(C,C) = 4 \end{array}$$

- Then agent i’s preferences are:

$$C,C \succeq_i C,D \quad \succ_i \quad D,C \succeq_i D,D$$

- “C” is the *rational choice* for i.
  (Because i prefers all outcomes that arise through C over all outcomes that arise through D.)

Payoff Matrices

- We can characterise the previous scenario in a *payoff matrix*

		i	
		defect	coop
j	defect	1 1	4 1
	coop	1 4	4 4

- Agent i is the *column player*.
- Agent j is the *row player*.

Dominant Strategies

- Given any particular strategy s (either C or D) agent i, there will be a number of possible outcomes.
- We say s_1 *dominates* s_2 if every outcome possible by i playing s_1 is preferred over every outcome possible by i playing s_2.
- A rational agent will never play a dominated strategy.
- So in deciding what to do, we can *delete dominated strategies*.
- Unfortunately, there isn't always a unique undominated strategy.

Nash Equilibrium

- In general, we will say that two strategies s_1 and s_2 are in Nash equilibrium if:
  1. under the assumption that agent i plays s_1, agent j can do no better than play s_2; and
  2. under the assumption that agent j plays s_2, agent i can do no better than play s_1.
- *Neither agent has any incentive to deviate from a Nash equilibrium.*
- Unfortunately:
  1. *Not every interaction scenario has a Nash equilibrium.*
  2. *Some interaction scenarios have more than one Nash equilibrium.*

Competitive and Zero-Sum Interactions

- Where preferences of agents are diametrically opposed we have *strictly competitive* scenarios.
- Zero-sum encounters are those where utilities sum to zero:

$$u_i(\omega) + u_j(\omega) = 0 \quad \text{for all } \omega \in \Omega.$$

- Zero sum implies strictly competitive.
- Zero sum encounters in real life are very rare ... but people tend to act in many scenarios as if they were zero sum.

4 The Prisoner's Dilemma

Two men are collectively charged with a crime and held in separate cells, with no way of meeting or communicating.
They are told that:

- if one confesses and the other does not, the confessor will be freed, and the other will be jailed for three years;
- if both confess, then each will be jailed for two years.

Both prisoners know that if neither confesses, then they will each be jailed for one year.

- Payoff matrix for prisoner's dilemma:

		i defect	i coop
j	defect	2	1
		2	4
	coop	4	3
		1	3

- Top left: If both defect, then both get punishment for mutual defection.
- Top right: If i cooperates and j defects, i gets sucker's payoff of 1, while j gets 4.
- Bottom left: If j cooperates and i defects, j gets sucker's payoff of 1, while i gets 4.
- Bottom right: Reward for mutual cooperation.

- The *individual rational* action is *defect*.
  This guarantees a payoff of no worse than 2, whereas cooperating guarantees a payoff of at most 1.
- So defection is the best response to all possible strategies: both agents defect, and get payoff = 2.
- But *intuition* says this is *not* the best outcome:
  Surely they should both cooperate and each get payoff of 3!

- This apparent paradox is *the fundamental problem of multi-agent interactions*.
  It appears to imply that *cooperation will not occur in societies of self-interested agents*.
- Real world examples:
  - nuclear arms reduction ("why don't I keep mine. . . ")
  - free rider systems — public transport;
  - in the UK — television licenses.
- The prisoner's dilemma is *ubiquitous*.
- Can we recover cooperation?

Arguments for Recovering Cooperation

- Conclusions that some have drawn from this analysis:
  - the game theory notion of rational action is wrong!
  - somehow the dilemma is being formulated wrongly
- Arguments to recover cooperation:
  - We are not all machiavelli!
  - The other prisoner is my twin!
  - The shadow of the future. . .

4.1 The Iterated Prisoner's Dilemma

- One answer: *play the game more than once.*
  If you know you will be meeting your opponent again, then the incentive to defect appears to evaporate.
- *Cooperation is the rational choice in the infinitely repeated prisoner's dilemma.*
  (Hurrah!)

4.2 Backwards Induction

- But. . . suppose you both know that you will play the game exactly n times.
  On round $n - 1$, you have an incentive to defect, to gain that extra bit of payoff. . .
  But this makes round $n - 2$ the last "real", and so you have an incentive to defect there, too.
  This is the *backwards induction* problem.
- Playing the prisoner's dilemma with a fixed, finite, pre-determined, commonly known number of rounds, defection is the best strategy.

4.3 Axelrod's Tournament

- Suppose you play iterated prisoner's dilemma against a *range* of opponents . . .
  What strategy should you choose, so as to maximise your overall payoff?
- Axelrod (1984) investigated this problem, with a computer tournament for programs playing the prisoner's dilemma.

Strategies in Axelrod's Tournament

- ALLD:
  "Always defect" — the *hawk* strategy;
- TIT-FOR-TAT:
  1. On round $u = 0$, cooperate.
  2. On round $u > 0$, do what your opponent did on round $u - 1$.
- TESTER:
  On 1st round, defect. If the opponent retaliated, then play TIT-FOR-TAT. Otherwise intersperse cooperation & defection.
- JOSS:
  As TIT-FOR-TAT, except periodically defect.

Recipes for Success in Axelrod's Tournament

Axelrod suggests the following rules for succeeding in his tournament:

- *Don't be envious*:
  Don't play as if it were zero sum!
- *Be nice*:
  Start by cooperating, and reciprocate cooperation.
- *Retaliate appropriately*:
  Always punish defection immediately, but use "measured" force — don't overdo it.
- *Don't hold grudges*:
  Always reciprocate cooperation immediately.

5 Game of Chicken

- Consider another type of encounter — the *game of chicken*:

		i: defect	i: coop
j	defect	i: 1, j: 1	i: 2, j: 4
j	coop	i: 4, j: 2	i: 3, j: 3

(Think of James Dean in *Rebel without a Cause*: swerving = coop, driving straight = defect.)

- Difference to prisoner's dilemma:

  Mutual defection is most feared outcome.

  (Whereas sucker's payoff is most feared in prisoner's dilemma.)
- Strategies (c,d) and (d,c) are in Nash equilibrium

6 Other Symmetric 2 x 2 Games

- Given the 4 possible outcomes of (symmetric) cooperate/defect games, there are 24 possible orderings on outcomes.
  - $CC \succ_i CD \succ_i DC \succ_i DD$
    Cooperation dominates.
  - $DC \succ_i DD \succ_i CC \succ_i CD$
    Deadlock. You will always do best by defecting.
  - $DC \succ_i CC \succ_i DD \succ_i CD$
    Prisoner's dilemma.
  - $DC \succ_i CC \succ_i CD \succ_i DD$
    Chicken.
  - $CC \succ_i DC \succ_i DD \succ_i CD$
    Stag hunt.